


VCS0

Our classic joystick.

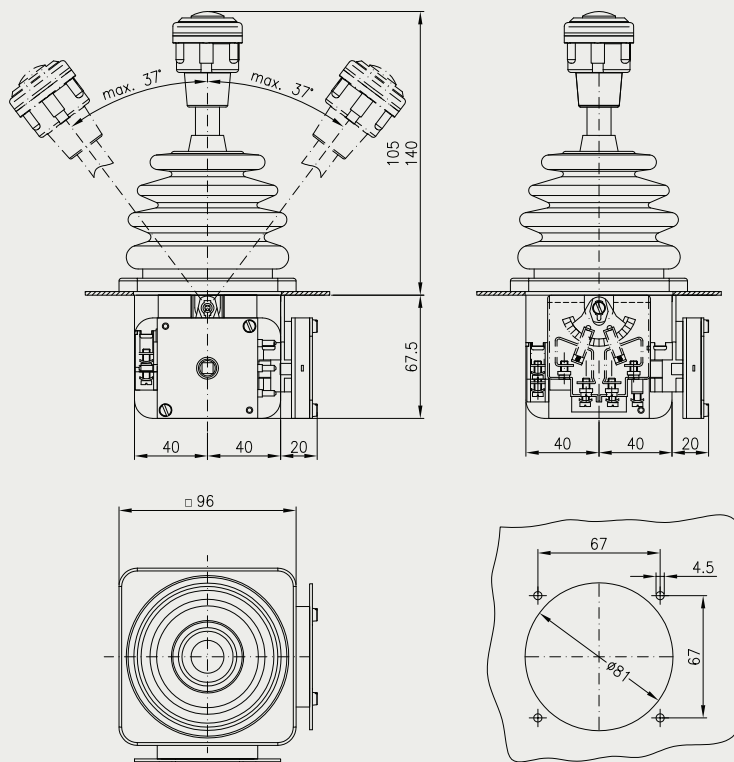

For medium-duty applications, we recommend this joystick which has been field-proven in use for decades. The drive block with special leak-current-proof, heat-resistant and cold-resistant insulation supports all mechanical components and serves as contact protection for the electrically conductive parts. An optional zero position, horn, or deadman's (operator presence) contact can be integrated in the drive block for space-saving and protected installation. Insulated double contact elements for up to 250 V and 10 A are intelligently positive locking and additionally flanged securely on the drive block. Various

connecting links are available for mechanical limiting or guidance of the direction of movement. Standard and special connections can also be provided with the use of up to four double contact elements per axis. Positive-locking potentiometers and encoders can be docked with the use of a simple sliding coupling or directly instead of a double contact element. In addition to numerous special equipment applications, this joystick is supplied as standard equipment for cranes, control stations, and in portable control consoles – thanks to its low weight.

