



Smart Carrier

KM715/10(25)


Structure

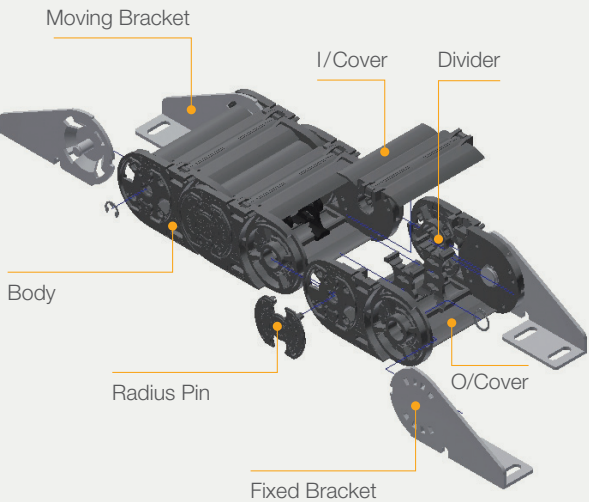


- KM715/10 : 0~2m 미만 사용시 권장
- KM715/25 : 2~4m 사용시 권장
- KM715/10 : Recommended for use under 0-2m
- KM715/25 : Recommended for use 2m to 4m

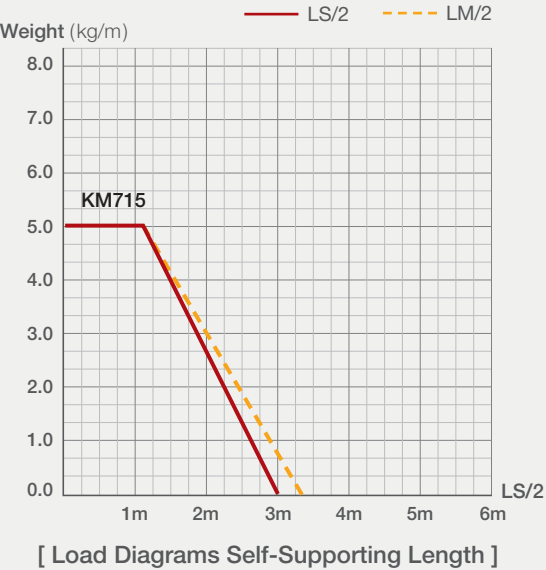

End Bracket

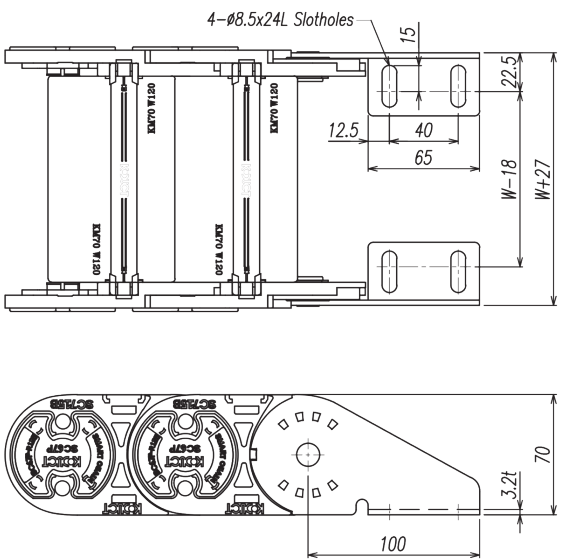


[Fixed Bracket (F/EB)]

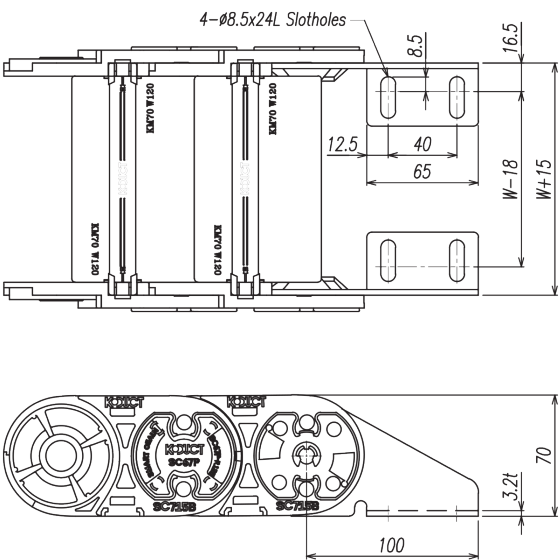

[Moving Bracket (M/EB)]


Carrier Link

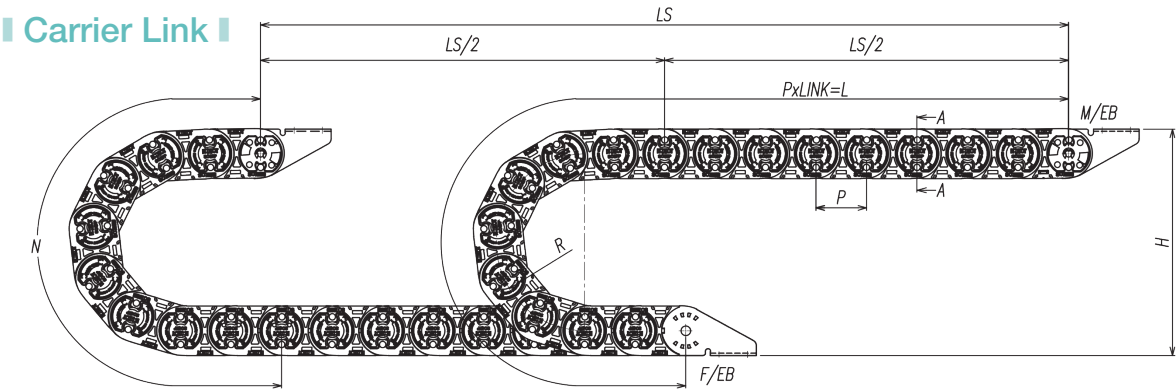


$$\left[L = \frac{LS}{2} + N \right]$$

- LS : Total Machine Travel
- L : Length
- N : Safety Length+πr
- P : Pitch
- R : Radius
- H : Height
- F/EB : Fixed Bracket
- M/EB : Moving Bracket

Section A-A

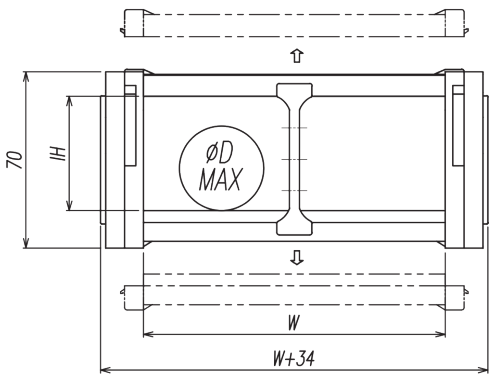

Divider

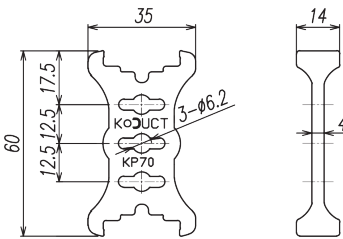

Separator : Ø6 (Aluminum)

Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	Height mm (inch)	N mm (inch)	IH mm (inch)	ØD max	DVDR (ea)	1m (kg)	EB Set (kg)
KM715 /10(25)	75 (2.952)	100 (3.937)	71.5 (2.815)	270 (10.630)	600 (23.622)	37 (1.456)	Ø16	0	3.06	
		125 (4.921)		320 (12.598)	679 (26.732)	41 (1.614)	Ø20			
		150 (5.906)	71.5 (2.815)	370 (14.567)	757 (29.803)	43 (1.692)	Ø25	1	3.38	0.75
		200 (7.874)		470 (18.504)	914 (35.984)	44 (1.732)	Ø33			
	120 (4.724)	250 (9.843)		570 (22.441)	1,071 (42.165)	45 (1.771)	Ø41			
								2	4.5	

(1inch = 25.4mm)