
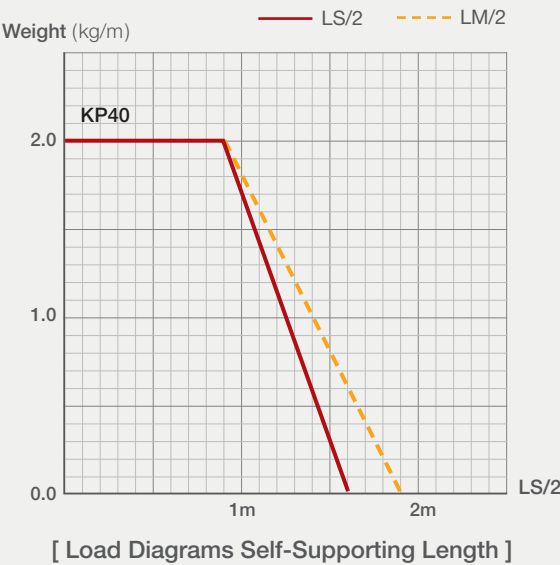



KP Carrier

KP40


Structure

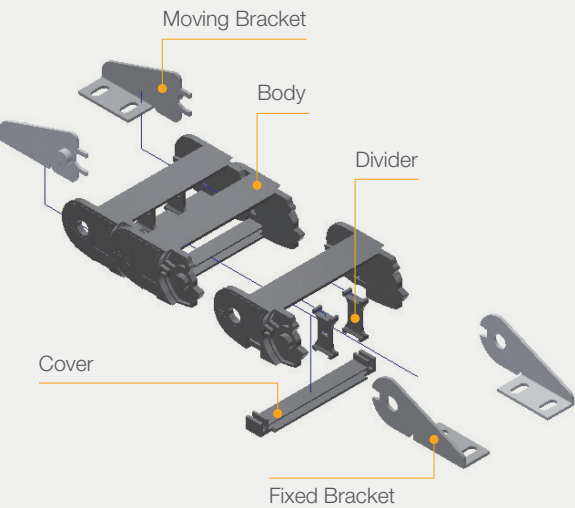

End Bracket

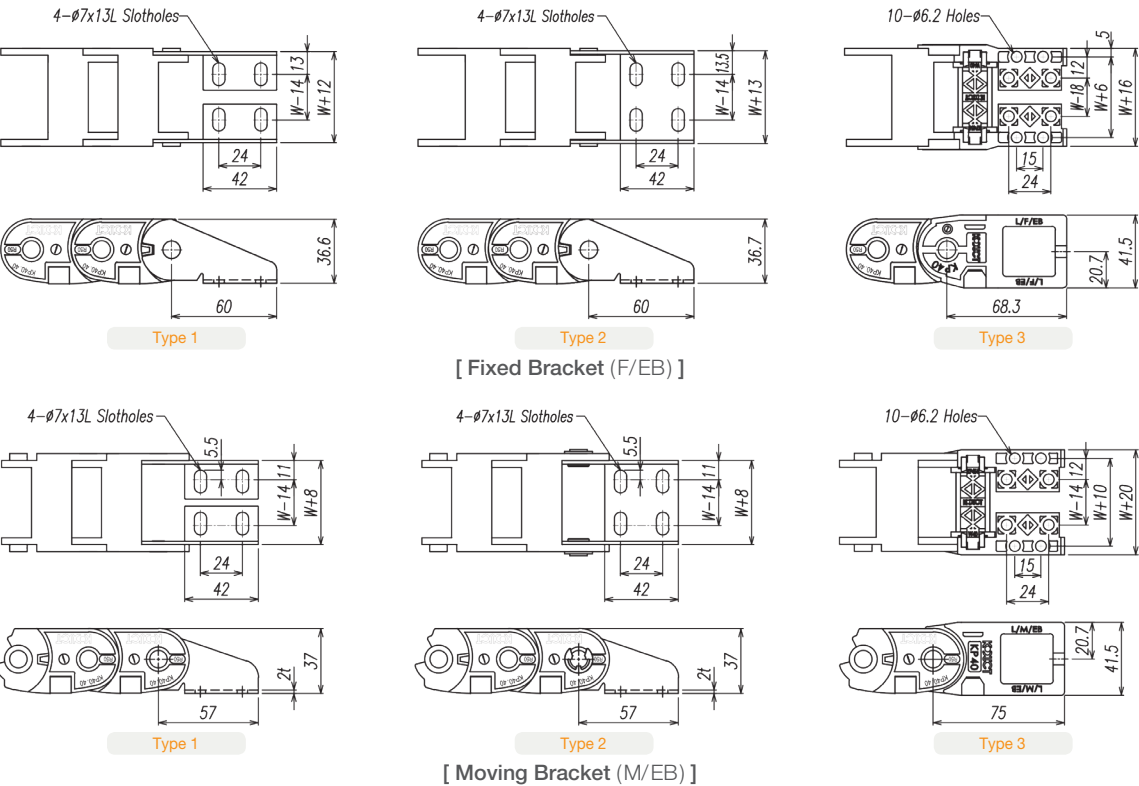


Carrier Link

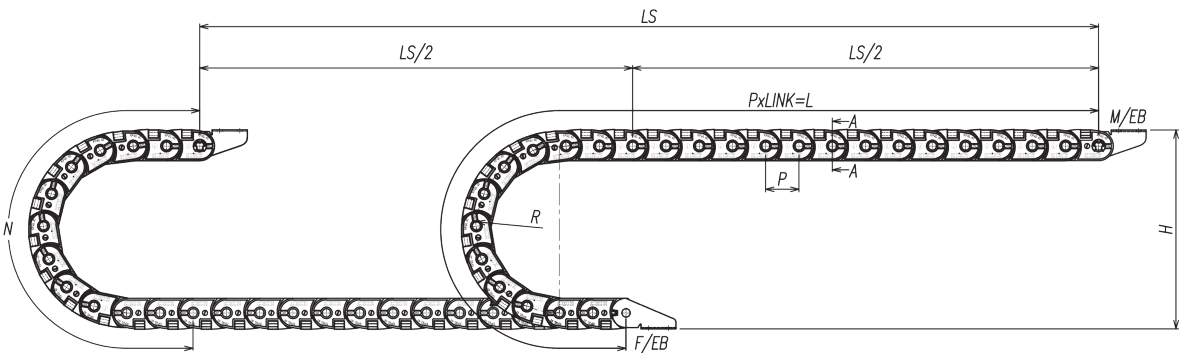


$$L = \frac{LS}{2} + N$$

- LS : Total Machine Travel
- L : Length
- N : Safety Length+rrr
- P : Pitch
- R : Radius
- H : Height
- F/EB : Fixed Bracket
- M/EB : Moving Bracket

Section A-A

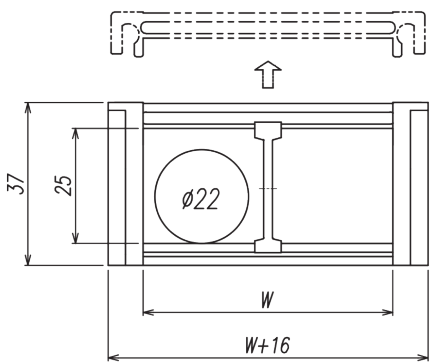

Divider



Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	Height mm (inch)	N mm (inch)	DVDR (ea)	1m (kg)	EB Set (kg)
KP40	40 (1.575)	50 (1.969)	40 (1.575)	139 (5.472)	317 (12.4800)	0	0.735	0.155 (Type1)
		75 (2.953)		189 (7.441)	396 (15.591)			
	57 (2.244)	100 (3.937)		239 (9.409)	474 (18.661)	0	0.795	0.170 (Type2)
	80 (3.150)	125 (4.921)		289 (11.376)	553 (21.772)	1	0.930	0.190 (Type2)
		150 (5.906)		339 (13.346)	631 (24.842)			
	100 (3.937)	200 (7.874)		439 (17.283)	788 (31.024)	1	0.985	0.098 (Type3)

※ Type2 : W40, W57만 가능 (only for W40, W57)

(1inch = 25.4mm)