
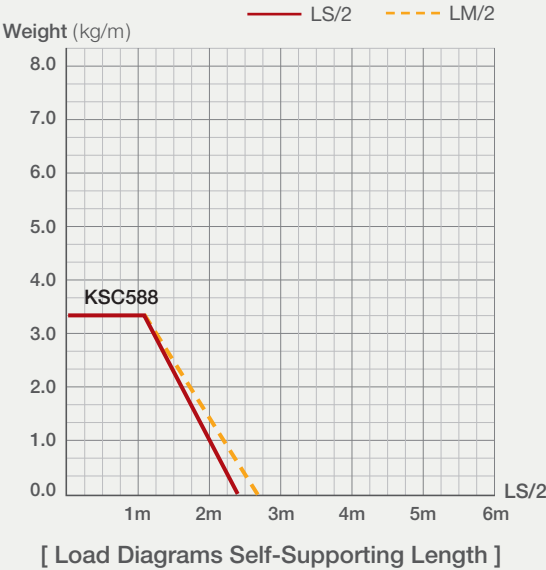


Smart Carrier


KSC588/10(25)

- KSC588/10 : 0~2m 미만 사용시 권장
- KSC588/25 : 2~4m 사용시 권장
- KSC588/10 : Recommended for use under 0-2m
- KSC588/25 : Recommended for use 2m to 4m


Structure

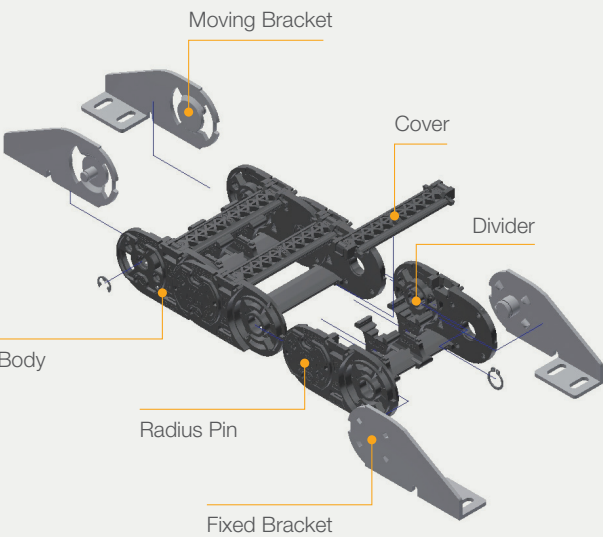


End Bracket

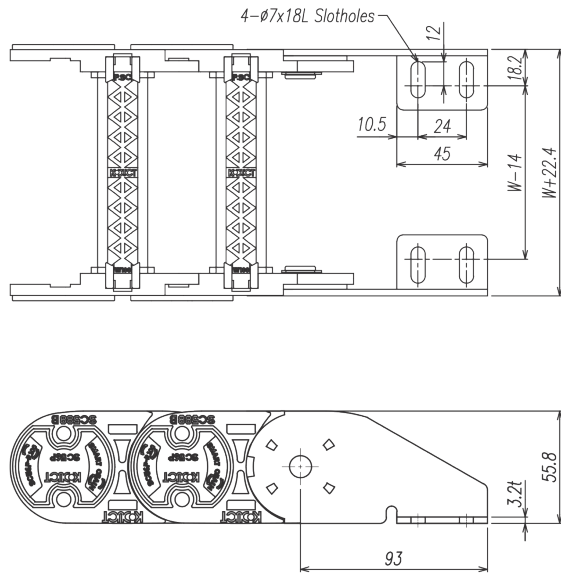

[Fixed Bracket (F/EB)]

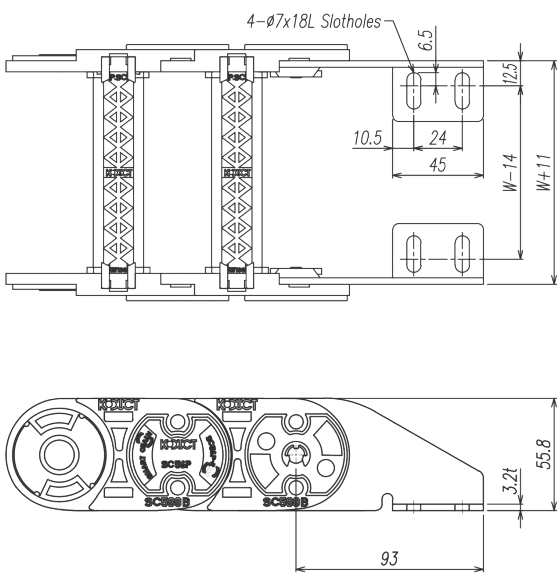


[Moving Bracket (M/EB)]

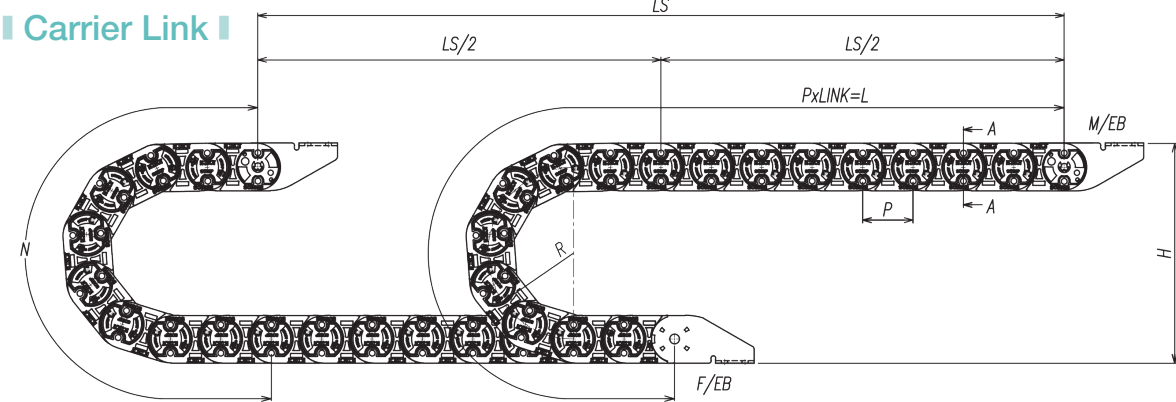


$$L = \frac{LS}{2} + N$$

- LS : Total Machine Travel
- L : Length
- N : Safety Length+rrr
- P : Pitch
- R : Radius
- H : Height
- F/EB : Fixed Bracket
- M/EB : Moving Bracket

Section A-A

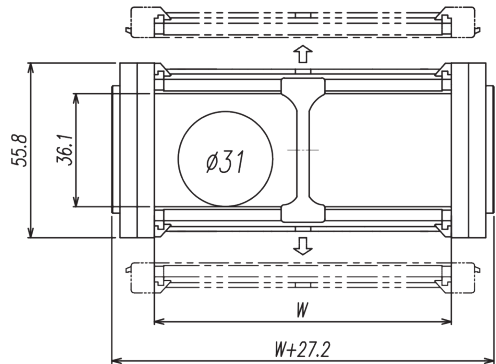

Divider



Separator : 14.5 x 4.4 (Plastic)

Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	Height mm (inch)	N mm (inch)	DVDR (ea)	1m (kg)	EB Set (kg)
KSC588 /10(25)	50 (1.969)	68	58.8 (2.315)	192	450	0	1.275	0.64
	65 (2.559)	(2.677)		(7.323)	(17.717)	0	1.384	
	*75 (2.952)	80		216	490	0	1.550	
	80 (3.149)	(3.150)		(8.484)	(19.291)	1	1.659	
	*87 (3.425)	100		256	550	1	1.714	
	100 (3.937)	(3.937)		(10.028)	(21.654)	1	1.727	
	120 (4.724)	125		306	630	2	1.931	
	*150 (5.905)	(4.921)		(11.815)	(24.803)	2	2.156	
	160 (6.299)	150		356	710	2	2.482	
	*175 (6.889)	(5.906)		(14.024)	(27.953)	2	2.594	
	*187 (7.362)	200		456	870	2	2.758	
	200 (7.874)	(7.874)		(17.953)	(34.252)	2	3.033	

* 주문 제작 가능 / Can make to order

(1inch = 25.4mm)