
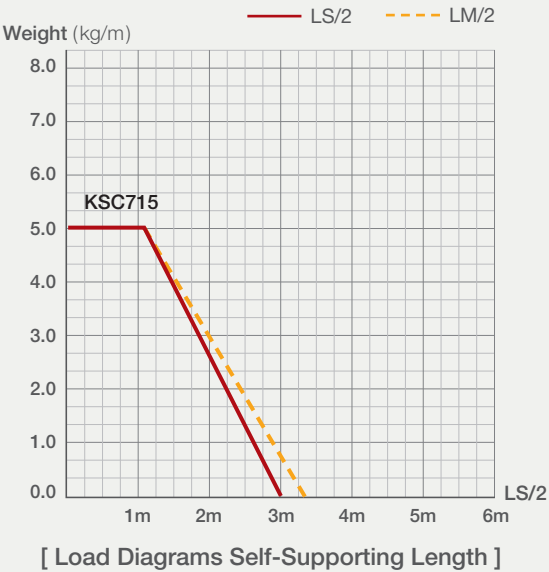




Smart Carrier

KSC715/10(25)

Structure

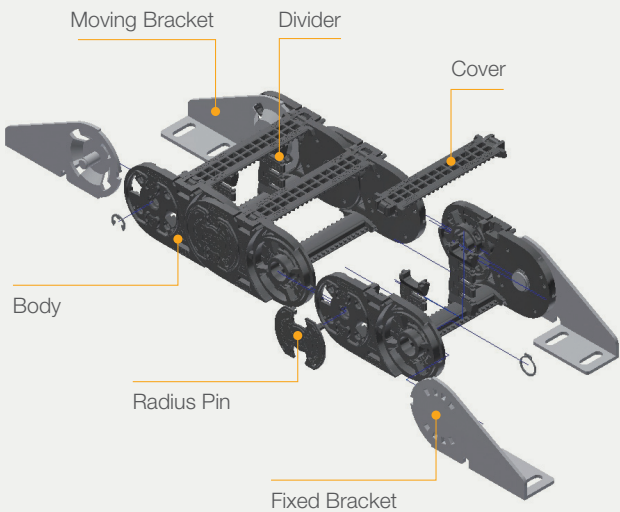


End Bracket

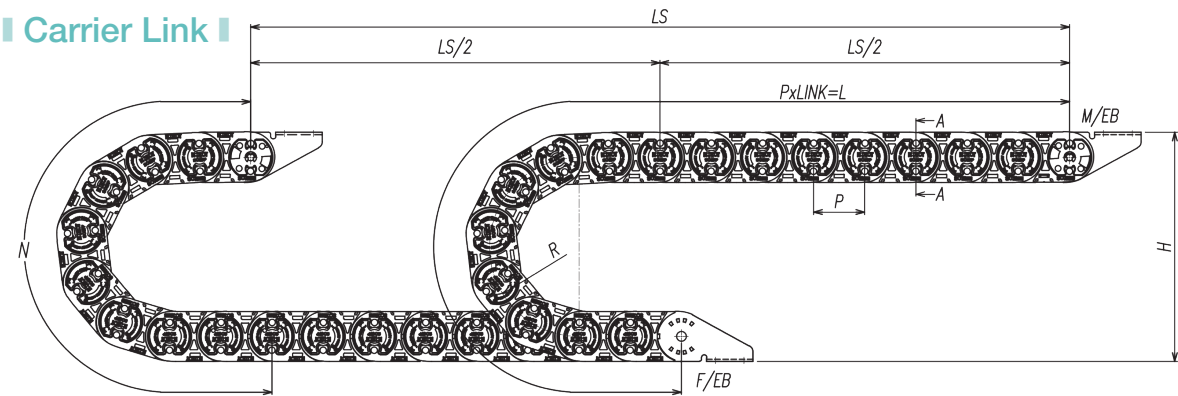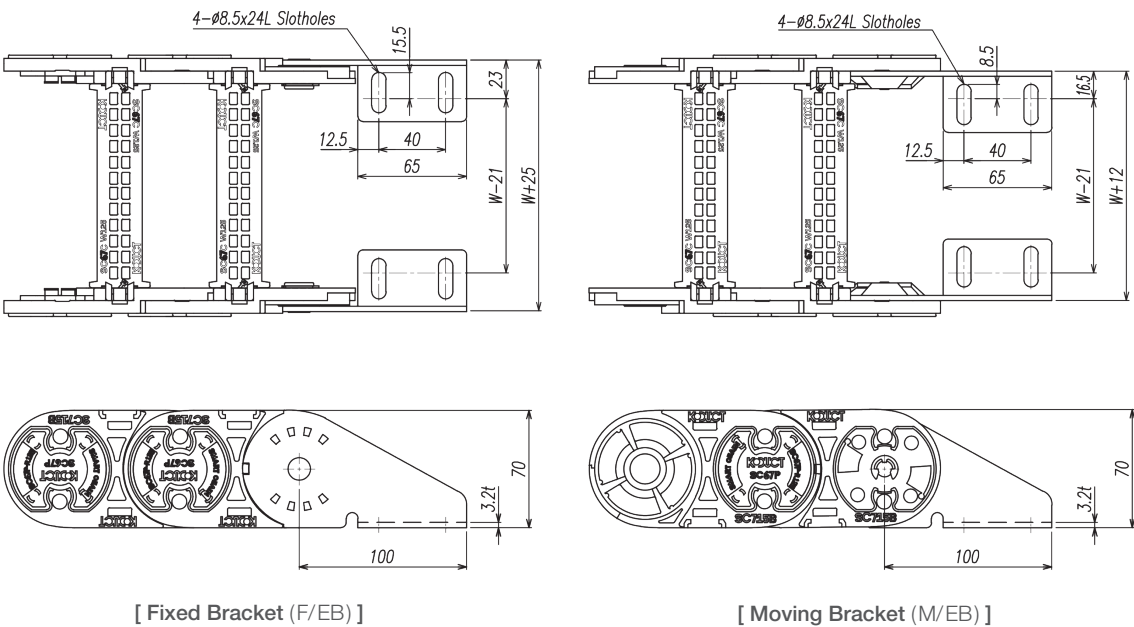


$$\left[L = \frac{LS}{2} + N \right]$$

- **LS** : Total Machine Travel
- **L** : Length
- **N** : Safety Length+πr
- **P** : Pitch
- **R** : Radius
- **H** : Height
- **F/EB** : Fixed Bracket
- **M/EB** : Moving Bracket

Section A-A

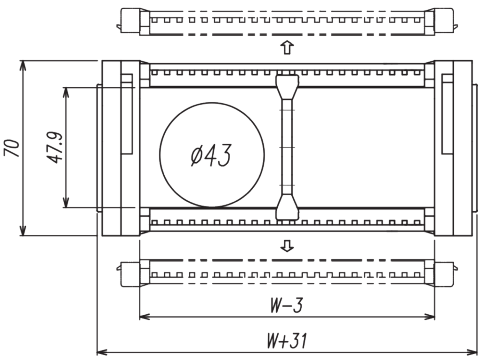

Divider



Separator : 14.5 x 4.4 (Plastic)

Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	Height mm (inch)	N mm (inch)	DVDR (ea)	1m (kg)	EB Set (kg)
KSC715 /10(25)	65 (2.559)	80 (3.150)	71.5 (2.815)	230 (9.055)	537 (21.142)	0	2.55	0.75
	80 (3.149)					1	2.63	
	100 (3.937)	100 (3.937)		270 (10.630)	600 (23.622)	1	2.72	
	125 (4.921)	125 (4.921)		320 (12.598)	679 (26.732)	2	2.80	
	150 (5.905)			370 (14.567)	757 (29.803)	2	2.88	
	175 (6.889)	150 (5.906)		470 (18.504)	914 (35.984)	2	3.05	
	200 (7.874)	200 (7.874)				3	3.14	
	225 (8.858)					3	3.22	
	250 (9.842)	250 (9.843)		570 (22.441)	1,071 (42.165)	3		

(1inch = 25.4mm)