



Hybrid Carrier

KH526/S


Structure

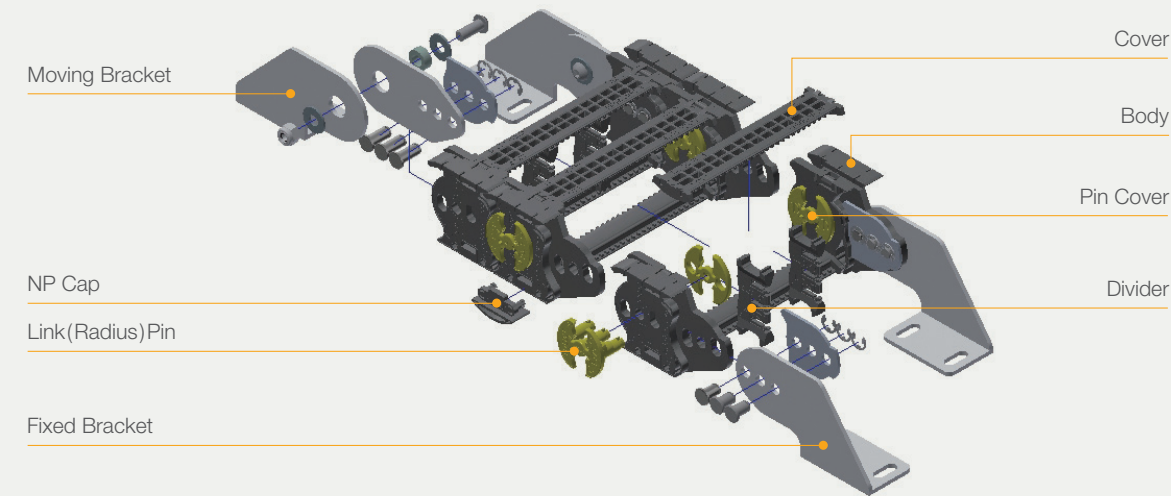

End Bracket

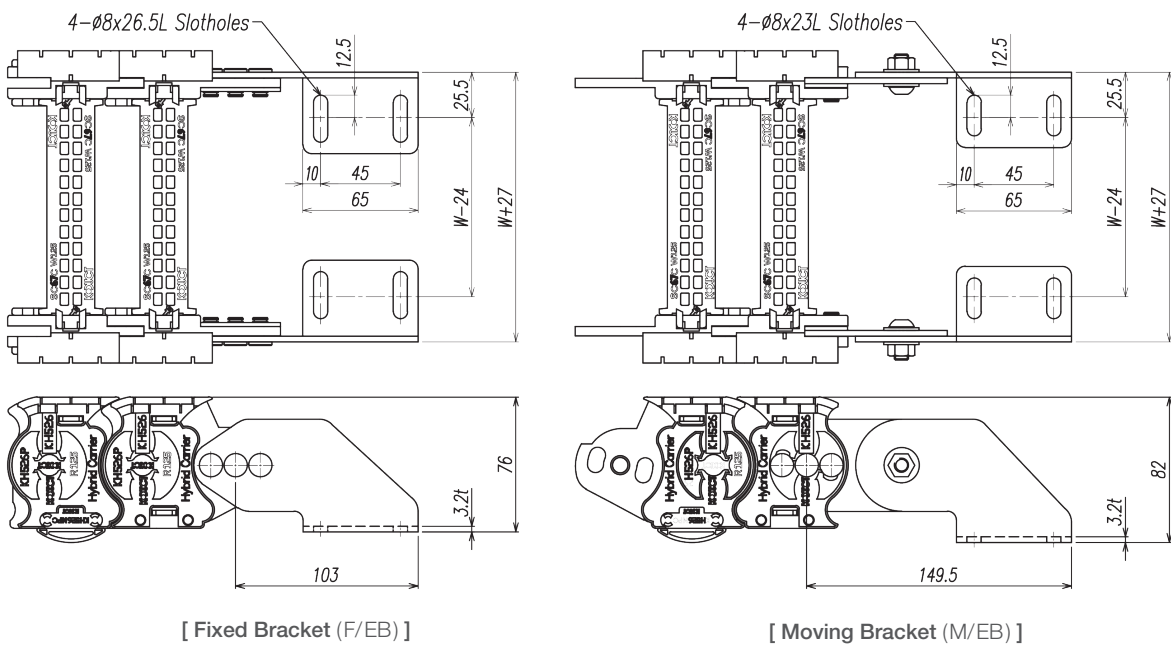


Carrier Link

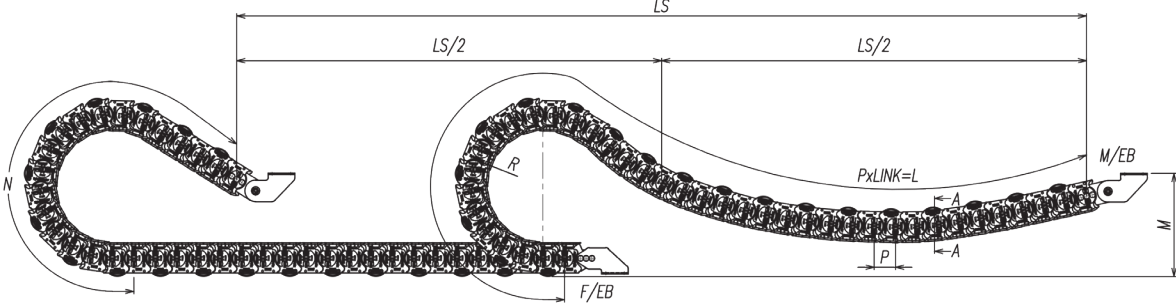


$$L = \frac{LS}{2} + N$$

- **LS** : Total Machine Travel
- **L** : Length
- **N** : Safety Length+πr
- **P** : Pitch
- **R** : Radius
- **M** : Moving Bracket Height
- **F/EB** : Fixed Bracket
- **M/EB** : Moving Bracket

Section A-A

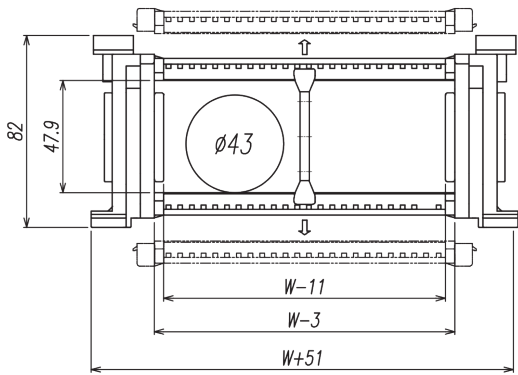

Divider



Separator : 14.5 x 4.4 (Plastic)

Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	M mm (inch)	N mm (inch)	DVDR (ea)	1m (kg)	EB Set (kg)
KH526/S	65 (2.559)	125 (4.921)	52.6 (2.070)	250 (9.842)	1,310 (51.574)	0	3.297	1.279
	80 (3.149)				1	3.417		
	100 (3.937)				1	3.625		
	125 (4.921)	175 (6.889)			1,470 (57.874)	2	3.746	
	150 (5.905)	225 (8.858)			2	3.831		
	175 (6.889)				2	3.917		
	200 (7.874)				2	4.002		
	225 (8.858)				1,790 (70.472)	3	4.123	
	250 (9.842)				3	4.208		

(1inch = 25.4mm)