

G40

Palm handle with or without hand rest.



Examples

G40




Version

Handle without fittings, hand rest with adapter	G40-8 / G40-12	
---	----------------	--

Fittings/Options for handle G40

Pushbutton flat or high, 1NO, coloured cap, wired with single leads, 1 m long, AWG24, Installation in Pos. 1, 2, 3 possible	FS, HS	
Pushbutton flat or high, 1NO 1NC, coloured cap, wired with single leads, 1 m long, AWG24, Installation in Pos. 1, 2, 3 possible	FOS, HOS	
Rocker switch 1 x changeover switch, installation in pos. 1 possible	W2T	
Hand rest		

G40H

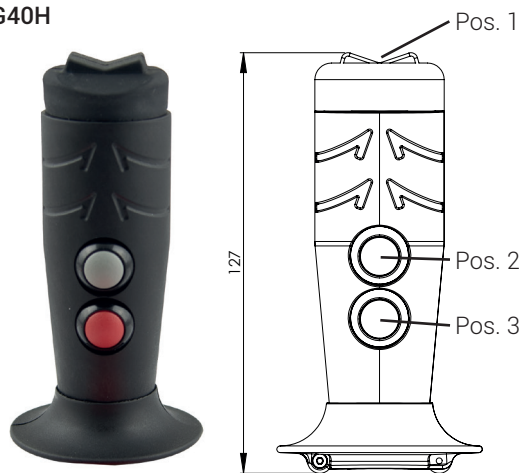

Type code:

Type	8				
Hand rest	G40	H	12	1W2T	2FSGY
Adapter					3FOSRD
Fittings with position, type and colour information					

Cap colours for pushbutton flat or high:



For more information about the fittings see page G-B1/2

1) when mounted on Spobu joystick

Palm handle for mounting on Spobu joysticks with 8 or 12 mm lever. For mounting on other joysticks different mounting adapters are available on request. These handles can be equipped with a maximum of 3 pushbuttons or with 2 pushbuttons and a rocker switch at the top. The control device installed in position 1 can easily be operated with the thumb. This sturdy plastic handle is used in construction vehicles, municipal vehicles, lifting platforms and many other applications.

Notes on handle wiring and maximum number of cores, see sheet G-V.

Possible combinations

Lever length	07	09	11	18
Joystick				
ST0		✓		
ST1	✓			
CS1, VCS0, VNS0, NNS0			✓	
NS3			✓	
HS2		✓		
VNS2				✓