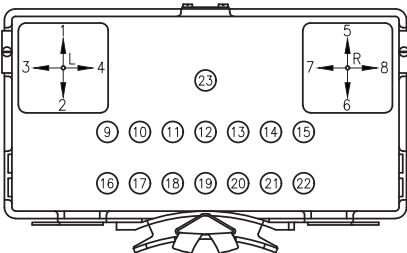


Portable control station T-56

IP 65

Stable with many installation options.

Picture	Description	
	Enclosure rectangular, plastic with: - External dimensions 430 x 224 x 120 (WxDxH) - Seal between upper and lower part - Stainless steel closing clips - Hinges on the back - Without bores/cut-outs - Without attachments/cable gland	
Versions with:	Colour enclosure	Type
Stainless steel foot rack, shoulder strap	yellow	T-56
	grey	TG-56
	black *)	TS-56
Stainless steel foot rack, breast plate (black) with shoulder strap	yellow	TB-56
	grey	TGB-56
	black *)	TSB-56
Installation positions:	Project planning notes:	
	For dimensions, see technical information TI-T-56. Please note the installation dimensions of the inserts.	
Options:		
Detachable breast plate BA instead of breast plate B		
Delivery without foot rack		
Standard layout with bores: - Pos. 1...4 and Pos. 5-8 for joysticks - Pos. 9...23 holes ø 22.5 mm		
Customised layout with bores/ cut-outs		
Joysticks ST0, ST4, M0N, HS0, CS1, NS3, VCS0, VNS0		
Control devices 22,5 mm		
Wiring on connection cable with plug		
Customised cable gland		

*) antistatic version for max. 24V operating voltage

Technische Informationen:

Material: GFK gelb

material: GFK yellow

Schutzart / Degree of protection max.IP65*

*Abhängig von Einbauten / Dependent on inserts

Brustplatte mit Tragegurt und Gurtschieber
breastplate with shoulder straps

Einbaumöglichkeiten:


Joysticks

Befehlsgeräte

Installations:

Joysticks

Control devices

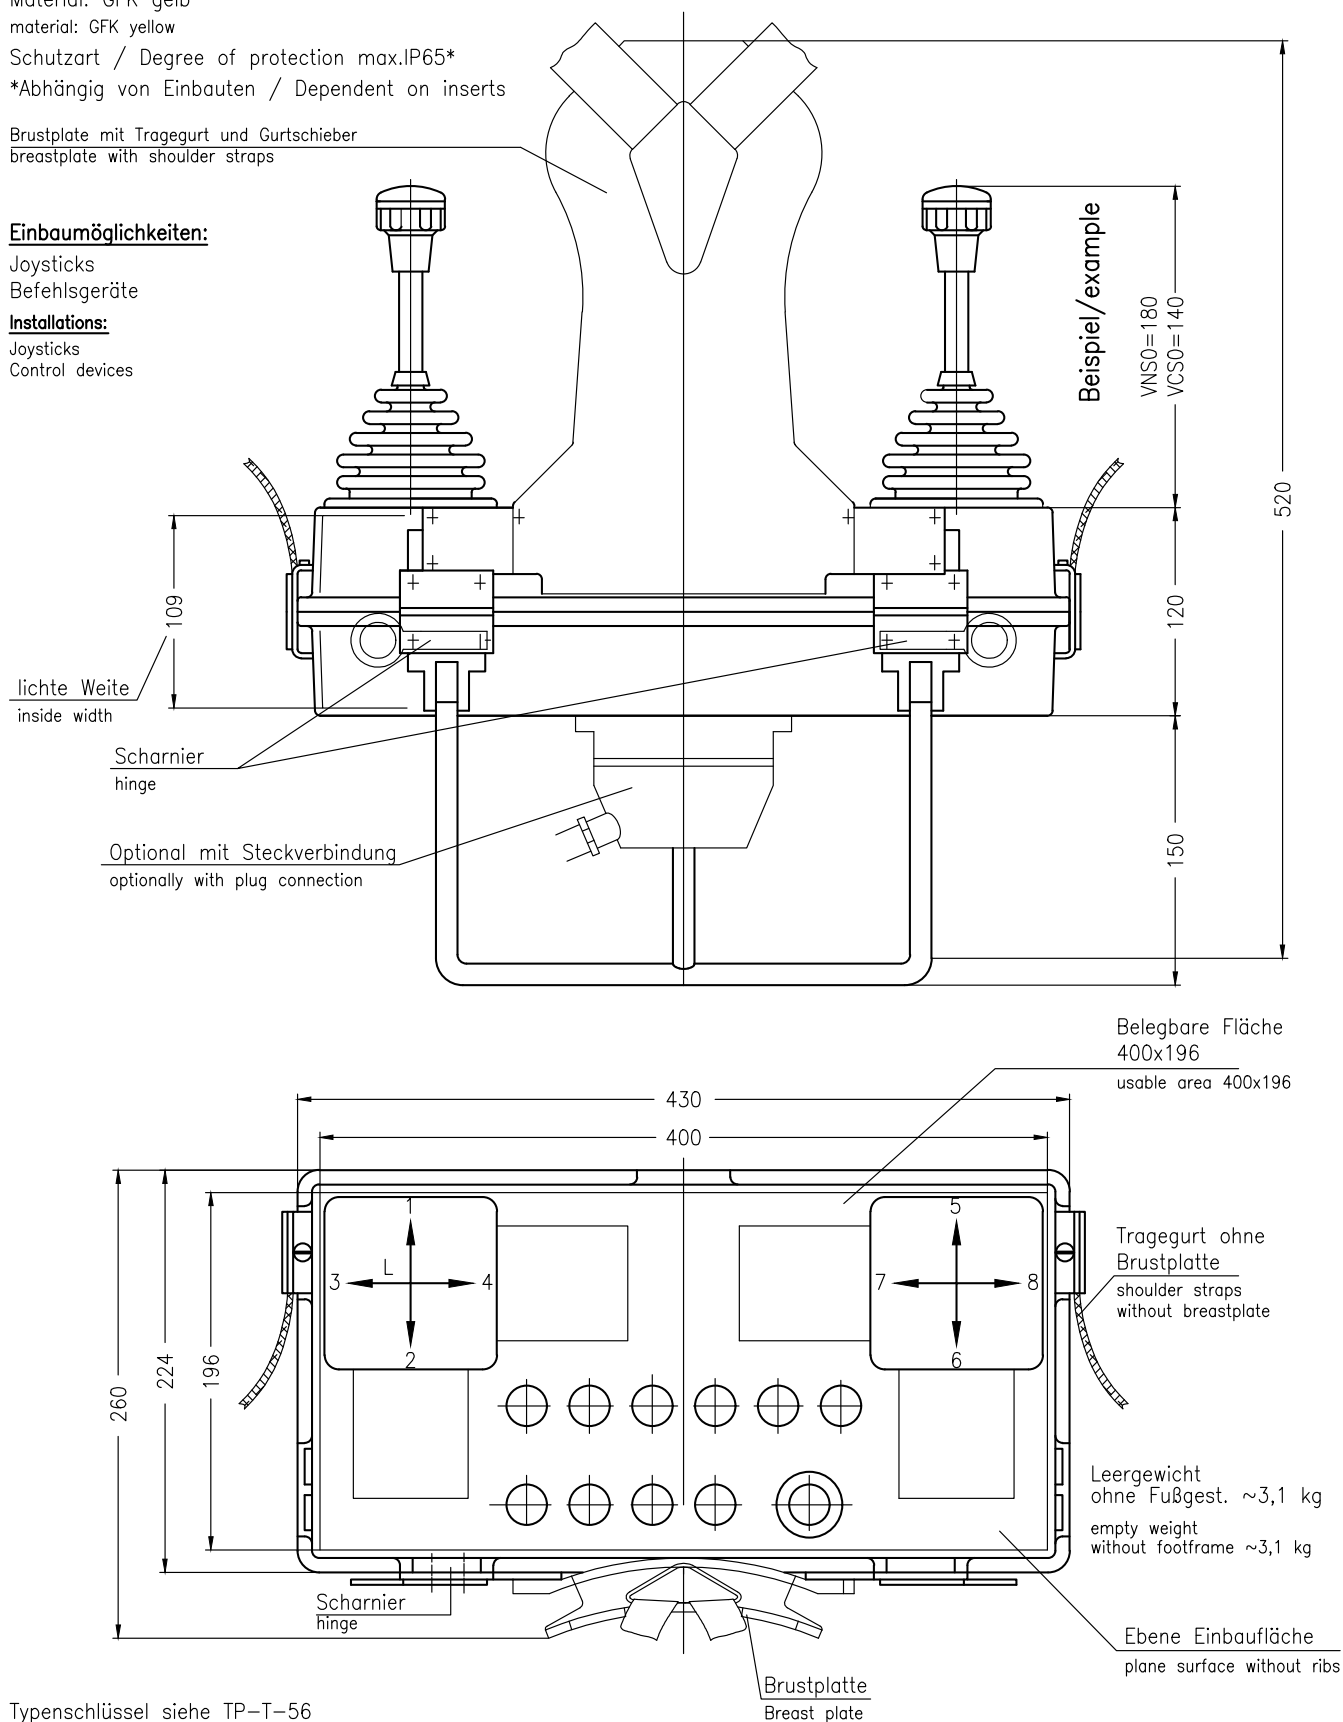

Typenschlüssel siehe TP-T-56
ordering example see TP-T-56