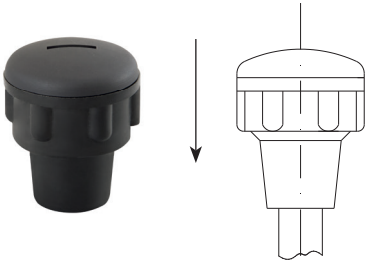





G41

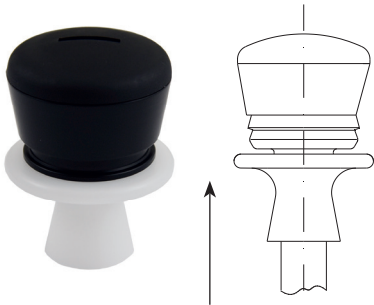
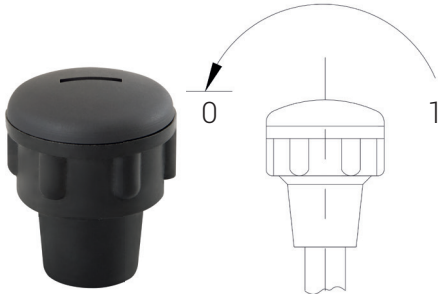
Handles for VCS0 and VNS0.

Design	Function	Contact	Type code G41...			
G41T... 	Handle with deadman button. A contact/contacts is/are actuated via a flexible shaft by pressing down the upper part of the handle.	1 NO		TS		
		1 NC		TO		
		1NO 1NC		TOS		
		2NO		TSS		
		2NC		TOO		
G41H... 	Handle with protruding button IP32. By pressing the button, a contact/contacts is/are actuated via a flexible shaft.	1 NO		HS		
		1 NC		HO		
		1NO 1NC		HOS		
		2NO		HSS		
		2NC		HOO		
G41HD... 	Handle with protruding button IP65. By pressing the button, a contact/contacts is/are actuated via a flexible shaft.	1 NO		HDS		
		1 NC		HDO		
		1NO 1NC		HDOS		
		2NO		HDSS		
		2NC		HDOO		
G41HDV... 	Handle with recessed button. By pressing the button, a contact/contacts is/are actuated via a flexible shaft.	1 NO		HDVS		
		1 NC		HDVO		
		1NO 1NC		HDVOS		
		2NO		HDVSS		
		2NC		HDVOO		

1) when mounted on Spobu Joystick

G41

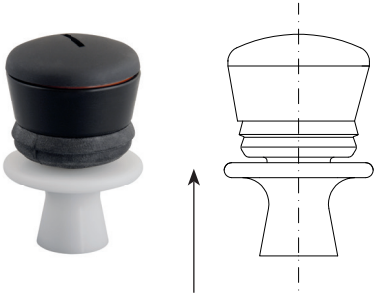
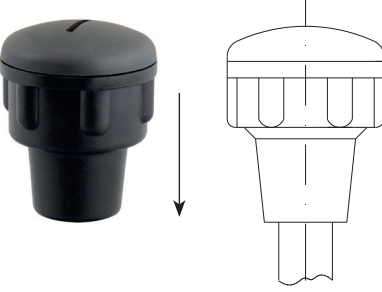
Handles for VCS0 and VNS0.

Design	Function	Contact	Type code G41...			
G41TY... 	By pulling up the lower part of the handle, a contact/contacts is/are actuated via a flexible shaft.	1 NO		TY5		
		1 NC		TY0		
		1NO 1NC		TY05		
		2NO		TY55		
		2NC		TY00		
G41D... 	By turning the handle, a contact/contacts is/are actuated via a flexible shaft. Retraction from 1 to 0.	1 Öffner		D0R		
		1NO 1NC		D0SR		

1) when mounted on Spobu Joystick

G41-Z, -IZ

Handles for mechanical interlock VCS0, VNS0.




Design	Function	Contact	Type code G41...			
G41Z... 	Handle for mechanical interlock. Unlocking by pulling up. Optionally with contact for unlocking.	without	Z 2)			
		1 NO	 ZS			
		1 NC	 ZO			
		1NO 1NC	 ZOS			
		2NO	 ZSS			
		2NC	 ZOO			
G41IZ... 	Handle for mechanical interlock. Unlocking by pressing down. Optionally with contact for unlocking. Only in combination with slotted or cross gate. Only with lever length 140 or 180mm.  	without	IZ 2)			
		1 NO	 IZS			
		1 NC	 IZO			
		1NO 1NC	 IZOS			
		2NO	 IZSS			
		2NC	 IZOO			

Additional handles for mechanical interlock of VCS0, VNS0 joysticks see sheet G-Z.

- 1) when mounted on Spobu Joystick
- 2) G41Z, G411Z (without contact) also with VNS0 Drive M

G41

Handles for mechanical interlock VCS0, VNS0.

Design	Function	Contact	Type code G41...			
G41HD...Z 	Handle for me- chanical interlock. Unlocking by pulling up, without contact. Pushbutton with con- tact in handle.	1 NO		HDSZ		
		1 NC		HDOZ		
		1 NO 1 NC		HDOSZ		
		2 NO		HDSSZ		
		2 NC		HDOOZ		
G41HDV...Z 	Handle for me- chanical interlock. Unlocking by pulling up, without contact. Recessed push button with contact in handle.	1 NO		HDVSZ		
		1 NC		HDVOZ		
		1 NO 1 NC		HDVOSZ		
		2 NO		HDVSSZ		
		2 NC		HDVOOZ		
G41HDF...Z 	Handle for me- chanical interlock. Unlocking by pulling up, without contact. Protruding pushbut- ton with contact in the handle.	1 NO		HDFSZ		
		1 NC		HDFOZ		
		1 NO 1 NC		HDFOSZ		
		2 NO		HDFSSZ		
		2 NC		HDFOOZ		

1) when mounted on Spobu Joystick