
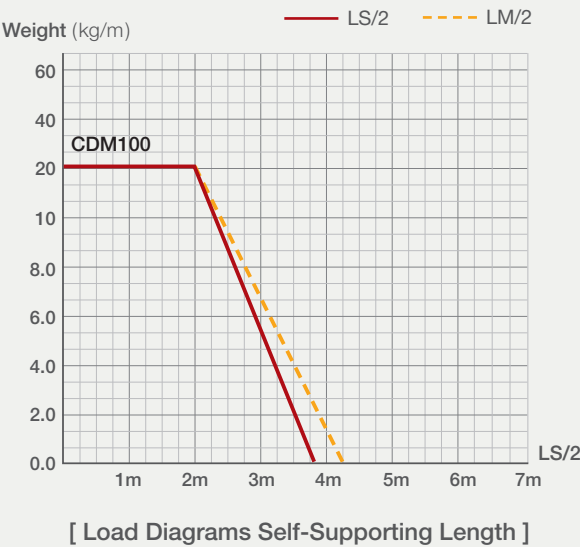



Fork Carrier

CDM100


Structure

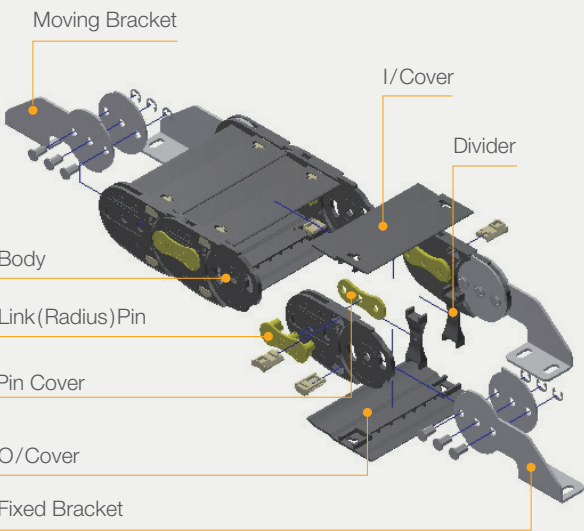

End Bracket

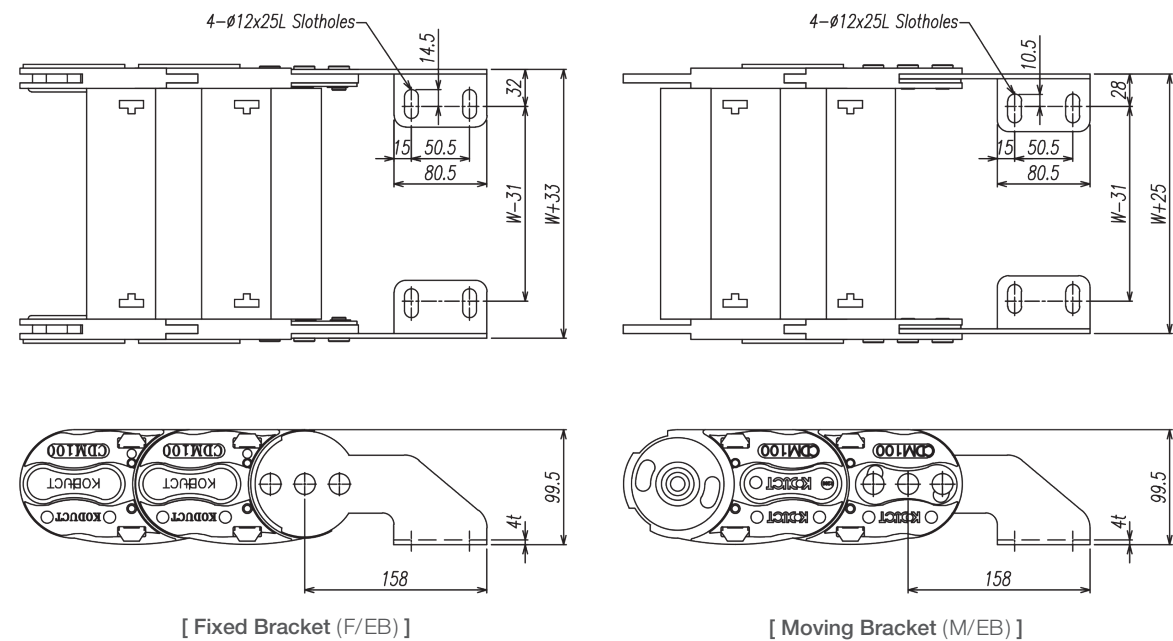


Carrier Link

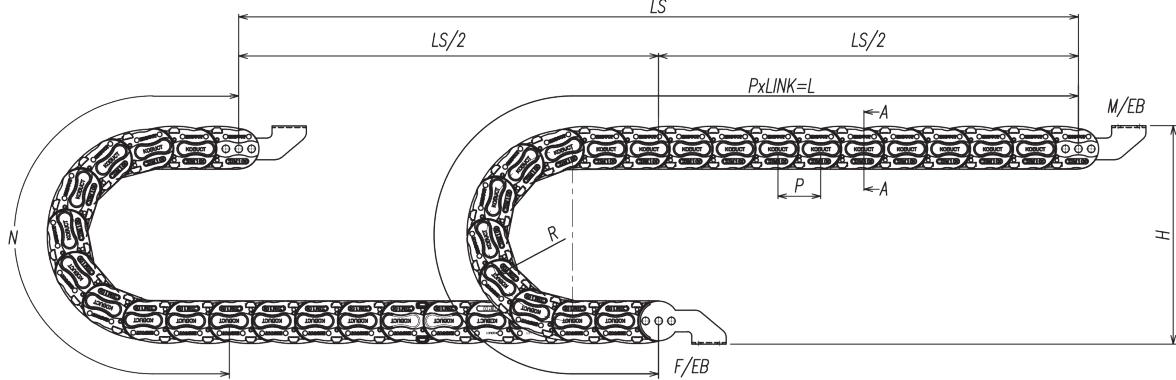


$$\left[L = \frac{LS}{2} + N \right]$$

- **LS** : Total Machine Travel
- **L** : Length
- **N** : Safety Length+rrr
- **P** : Pitch
- **R** : Radius
- **H** : Height
- **F/EB** : Fixed Bracket
- **M/EB** : Moving Bracket

Section A-A

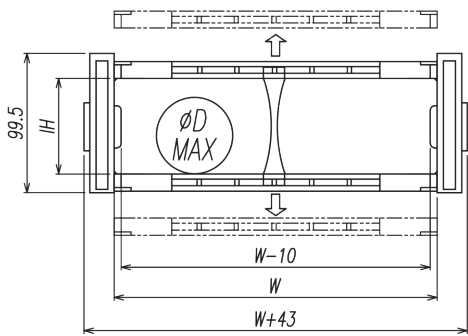

Divider



Separator : Ø5 (Aluminum)

Specification

TYPE	W mm (inch)	Radius mm (inch)	Pitch mm (inch)	Height mm (inch)	N mm (inch)	IH mm (inch)	ØD MAX	DVDR (ea)	1m (kg)	EB Set (kg)
CDM100	150 (5.906)	200 (7.874)	100 (3.937)	506 (19.921)	1,028 (40.472)	63 (2.480)	Ø33	2	5.322	3.043
		250 (9.843)		606 (23.858)	1,185 (46.653)	66 (2.598)	Ø42			
	200 (7.874)	300 (11.811)		706 (27.795)	1,342 (52.835)	68 (2.677)	Ø50	2	5.746	
		350 (13.780)		806 (31.732)	1,499 (59.016)	68 (2.677)	Ø58			
	300 (11.811)	400 (15.748)		906 (35.669)	1,656 (65.197)	68 (2.677)	Ø64	3	7.199	
		500 (19.685)		1,106 (43.543)	1,970 (77.559)	68 (2.677)	Ø64			

(1inch = 25.4mm)